



## HYPERSEAL<sup>®</sup>-2K-F

### Two Component, Pourable Grade Polyurethane Sealant According to SS-S-200E

#### DESCRIPTION

**HYPERSEAL<sup>®</sup>-2K-F** is a two component, horizontal grade polyurethane sealant, ideal for large construction joints. Upon curing, it produces a high performance sealant that also provides significant waterproofing, with excellent resistance to various climatic and temperature conditions. Furthermore, the sealant has very good resistance to chemicals and other severe exposures.

#### COMPLIANCE

The product complies with:

- ASTM C920 (Class 50: +/- 50% movement)
- DIN 18540
- SS-S-200D
- SS-S-200E, Type H (slow curing, hand mixing)

#### RECOMMENDED FOR

- Sealing of large expansion construction joints
- Sealing of joints in water tanks
- Sealing of joints in Irrigation channels
- Sealing of joints in airport runways

#### LIMITATIONS

- Not recommended for unsound substrates.

#### FEATURES & BENEFITS

- Excellent resistance to ageing, microorganisms, fungi and several chemicals.
- Suitable for potable water (certificate available upon request).
- Over paintable.
- Remains elastic even below -40°C.
- Resistant to both salt water and sweet water.
- Good resistance to microorganisms and a variety of chemicals.
- Good mechanical properties.
- Resistant to accidental contact with petroleum derivatives according to specification SS-S-200E.

Certified quality, environmental and occupational health & safety management systems:  
ISO 9001/14001 & ISO 45001.

- Special Primers available for almost any substrate.

#### APPLICATION

Recommended application temperature range varies between +5 °C to +35 °C. At higher temperatures, there is a decrease in the pot life of the material.

Ensure that the joint to be filled is thoroughly cleaned and dried prior to application of the sealant.

If the bottom of the joint is open, a polyethylene backing rod (or polystyrene) is inserted so as to leave a depth about half of the width of the joint. Apply a suitable primer depending on the condition of the substrate as well as the climatic conditions at the time of application

- On porous substrate, use **PRIMER-PU**
- On humid substrates, use **AQUASMART<sup>®</sup>-DUR** or **AQUADUR**.

**HYPERSEAL<sup>®</sup>-2KF** A & B components are thoroughly mixed and the final product is poured slowly into the joint. Alternatively, the sealant may be applied by spatula or appropriate dispensing gun.

#### PRECAUTIONS

- No problem after fully cured.
- Ask for MSDS (Material Safety Data Sheet)

#### CONSUMPTION – COVERAGE RATE

Kg / linear meter of joint

WIDTH \ DEPTH	2cm	4cm	8cm
1cm	<b>0.280</b> Kg/m	<b>0.560</b> Kg/m	<b>1.12</b> Kg/m
2 cm	<b>0.560</b> Kg/m	<b>1.12</b> Kg/m	<b>2.24</b> Kg/m



## HYPERSEAL<sup>®</sup>-2K-F

### CLEANING

Clean tools and equipment first with paper towels and then wipe by using Acetone or Xylene, etc.

### PACKAGING

2 Kg Component A + 4 Kg Component B

4 Kg Component A + 8 Kg Component B


### SHELF LIFE

**HYPERSEAL<sup>®</sup>-2K-F** can be kept for minimum 12 months in the original unopened packages at a temperature of +/-20 °C in dry places.

### TECHNICAL SPECIFICATIONS

PROPERTY	UNITS	METHOD	SPECIFICATION
-Density, at 20 °C	gr/cm <sup>3</sup>	ISO 2811 / DIN 53217 / ASTM D1475	1.4-1.5
-Hardness	Shore A	ISO R868 / DIN 53505 / ASTM D2240	30 ± 5
-Service Temperature	°C	-	-40 up to 90
-Application Temperature	°C	-	5 up to 35
-Tack Free Time at 77deg F (25°C) & 55% RH	hours	-	1-3
-Elongation at Break	%	ASTM D412 / EN-ISO-527-3	>500
-Modulus at 100% elongation	N/mm <sup>2</sup>	ASTM D412 / EN-ISO-527-3	0.4
-Resilience	%	DIN 52458	>80
-QUV Accelerated Weathering Test (4hr UV, at 60°C (UVB- Lamps) & 4hr COND at 50°C)	-	ASTM G53	Passed (after 1000hr)
-Toxicity	-	-	No restrictions as cured
-Hydrolysis (8% KOH, 15 days @ 50°C)	-	-	No elastomeric property change
-Hydrolysis (H <sub>2</sub> O, 30 days- cycle 60-100°C)	-	-	No elastomeric property change
-HCl (PH=2, 10 days @RT)	-	-	No elastomeric property change

NONE OF OUR PUBLISHED INSTRUCTIONS AND SPECIFICATIONS, IN WRITING OR OTHERWISE, ARE BINDING EITHER IN GENERAL OR WITH RESPECT TO ANY THIRD PARTY RIGHTS, OR DO THEY RELIEVE INTERESTED PARTIES OF THEIR DUTY TO SUBJECT THE PRODUCT TO AN ADEQUATE EXAMINATION OF ITS SUITABILITY. IN NO EVENT WILL ALCHIMICA S.A. BE RESPONSIBLE FOR DAMAGES OF ANY NATURE, WHATSOEVER, RESULTING FROM THE USE OF OR RELIANCE UPON INFORMATION OR THE PRODUCT TO WHICH INFORMATION REFERS. ALCHIMICA S.A. RESERVES THE RIGHT TO CHANGE AT ANY TIME THE PROPERTIES OF ITS PRODUCTS. PLEASE REFER TO THE CURRENT VERSION OF THE TECHNICAL DATA SHEET, AVAILABLE FROM OUR WEB SITE [WWW.ALCHIMICA.COM](http://WWW.ALCHIMICA.COM)

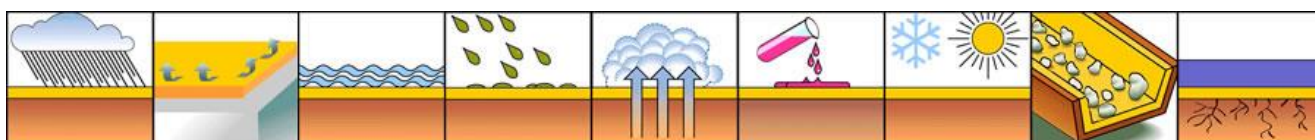

Certified quality, environmental and occupational health & safety management systems:  
ISO 9001/14001 & ISO 45001.